

Vinyl Finishes

Vinyl Designer Collection




HUF COR[®]

shaping your experience

CESTA PATTERN

*NOT recommended for use on a tackable surface.
Tack holes will become visible over time.*

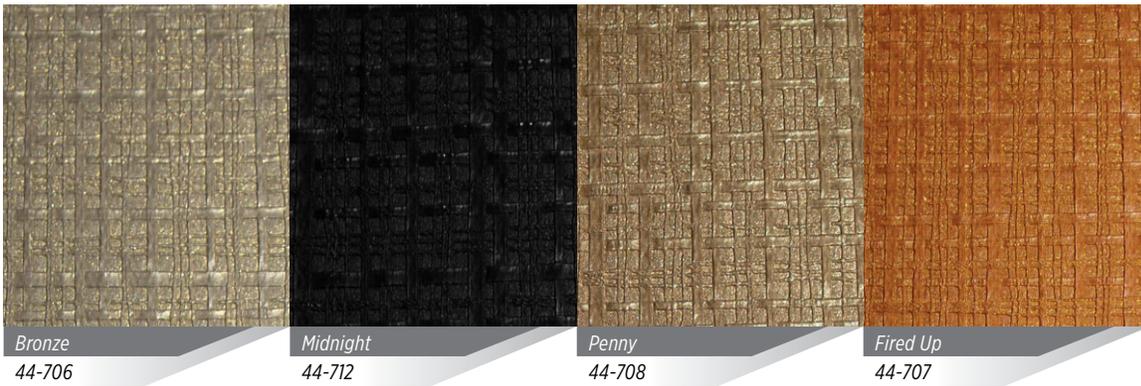

GEM PATTERN


*NOT recommended for use on a tackable surface.
Tack holes will become visible over time.*



** Actual color provided may vary from swatch shown due to dye lot variations. Room lighting may also change the color's appearance.*

SILK STRIA PATTERN

Not recommended for use on a tackable surface.
Tack holes will become visible over time.

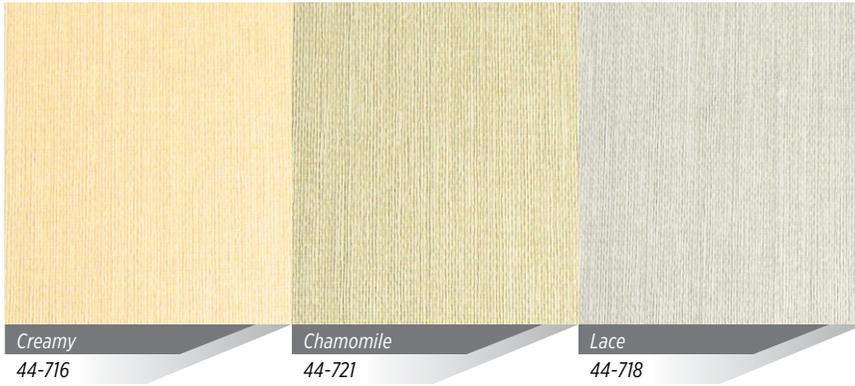

TERRAIN PATTERN

Not recommended for use on a tackable surface.
Tack holes will become visible over time.



* Actual color provided may vary from swatch shown due to dye lot variations. Room lighting may also change the color's appearance.

ARMOR PATTERN

NOT recommended for use on a tackable surface.


Tack holes will become visible over time. Pattern is a random match.



CASCADE PATTERN

NOT recommended for use on a tackable surface.

Tack holes will become visible over time. Pattern is a random match.

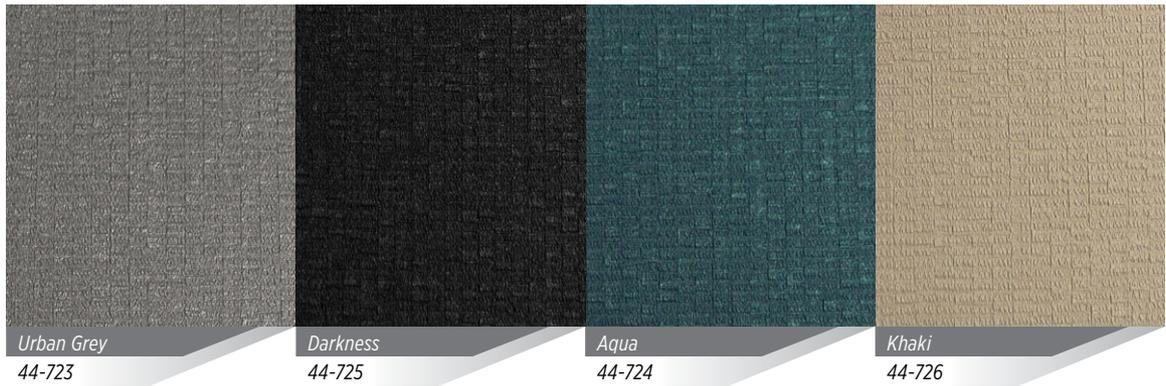

* Actual color provided may vary from swatch shown due to dye lot variations. Room lighting may also change the color's appearance.

PRODUCT FEATURES

- » Compliant with CDPH/EHLB Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions
- » Antimicrobial (non-arsenic). This product is intended for use in buildings that are properly designed and maintained to avoid moisture infiltration, condensation and/or accumulation at wall surfaces, particularly in warm, humid climates.
- » Compliant with California, Proposition 65
- » PFOA free-does not contain, nor will it degrade to, Perfluoro Octanoic Acid (PFOA)
- » NFPA 101 and IBC Class A interior wall finish rating when tested using ASTM-E84 method of reinforced cement board when tested in accordance with NFPA 286
- » Meets ISO 14064-1,2,3:2006 Greenhouse Gases



VINYL SPECIFICATIONS

Type II & Class A Patterns
Gem, Cesta, Silk Stria, Cascade, Terrain, Armor

Minimum Weight: **20 oz./linear yard**

Average Width: **54" [1372mm]**

CCFA-W-101: ✓

CCC-W-408A: ✓

Flame Developed: **15 cement board***

Smoke Developed: **20 cement board***


MEA Approved N.Y. Dept of Building: ✓

NFPA 101-94 when tested by ASTM E84: ✓

**Independent testing available upon request.*

CLEANING INSTRUCTIONS

- » Common dirt and stains may be removed from wallcovering by rubbing lightly with a moistened cloth or natural sponge using mild soap, detergent or non-abrasive cleanser. It is important that clean water be continuously used and that the material be towel dried.
- » CAUTION: Strong organic solvents (such as ketones) and harsh abrasive cleaners are not recommended. These materials will cause dulling, discoloration or softening of the vinyl, possibly resulting in permanent damage.

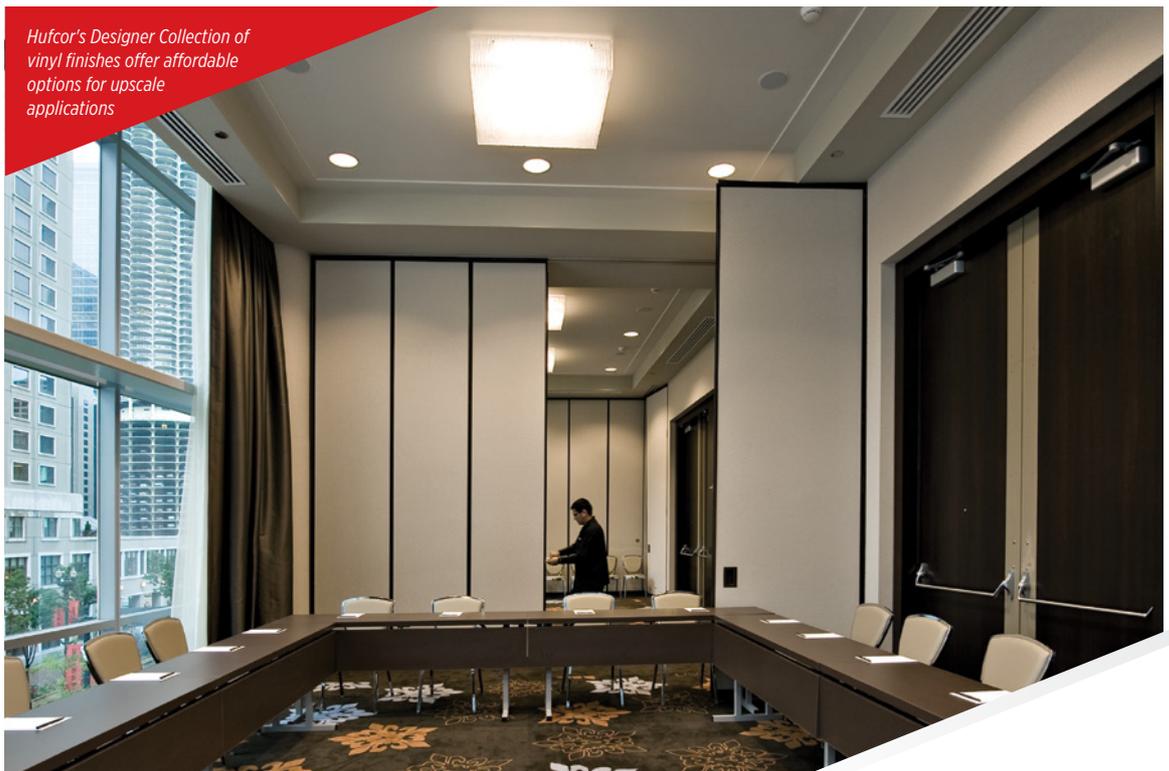

Hufcor's Designer Collection of vinyl finishes offer affordable options for upscale applications



2101 Kennedy Rd. • P.O. Box 5591
Janesville, WI USA 53547-05591
Tel: 608-756-1241 or 800-356-6968
HUF COR.COM